

240 kg load capacity per panels

Glass thickness up to 24 mm (6+12+6)




Drainage holes on bottom rail for efficient water draining



Bottom wheel carriages with double rollers ensure optimum and smooth running sliding with wide glass panes

Stainless steel bottom rail for easy and smooth movement

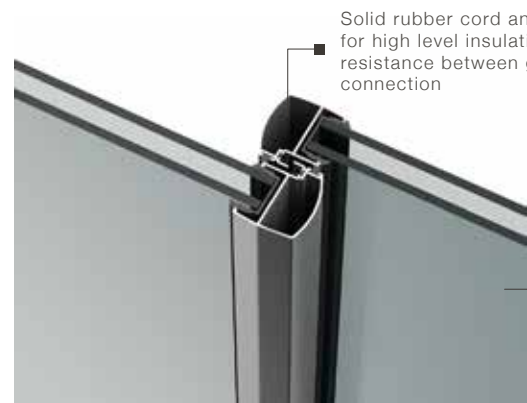

Solid rubber cord and brush for high level insulation and resistance between glass panels connection

6+12+6mm tempered insulated double glass



Taking up minimum space in open position up to 8 panels option



Rubber cord for feature a smooth, compact look and concealed soft-close technology

Special sloped rail design for efficient drainage

Brush seal on joint point of panels for maximizing air insulation



Adjustable panel height up to 8mm